



## **M-Crown Tag**


#### **FEATURES**

- M-Crown tag operates effectively with read range of over 15m when attached to metal.
- Rugged construction for high durability.
- Can be attached by screws with the help of two holes.
- Can also be provided with Adhesive tape for easy attachment.

#### **APPLICATIONS**

- M-Crown can be effectively used in asset tracking, Warehouse management, Containers and Railway Coaches identification.
- Factory automation, Automotive & Security purpose.


Chip Type:	Alien Higgs 9, GS1 Class 1 Gen 2	
	EPC Memory: Up to 496-EPC Bits (nominally 96 bits)	
	User Memory: Up to 688 Bits	
	Data Retention: 50 Years	
	Write Endurance: 200,000 Cycles	
Mechanical:	Dimension	150 x 25 x 12 mm
	Material	ABS
	Colour	Blue
	Weight	25.8 g
Electrical:	Operating	865-868MHz, (902-928MHz also available on
	Frequency	request)
	Operating mode	Passive (battery-less transponder)
Ingress Protection:	IP67	
Thermal:	Storage Temp.	-25°C to +85°C
inermai:	Operating Temp.	-25°C to +85°C
Part Number:	315V6	
Options:	Available with:	
	Other IC type on request	
	Other plastic material and colours e.g. PC/ABS	
	Adhesive backing for easy mounting	

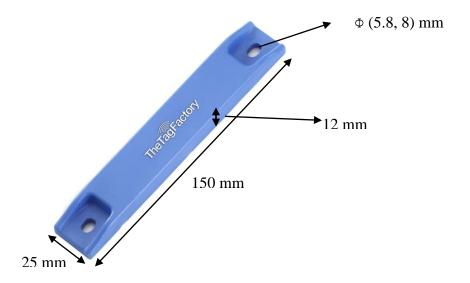

Note: Tolerance applicable are Length: ±1mm, Width: ±0.5mm and Thickness: ±0.3mm

### **Tag Placement**


- M-Crown is polarized perpendicular to TTF logo.
- ♣ Place the tag in such a way that most of its bottom area comes in direct contact with metal.
- **♣** Ensure that there is no hindrance between the tag and the reader antenna.
- ♣ Reader antenna should be parallel to the tag length as shown in below figure:

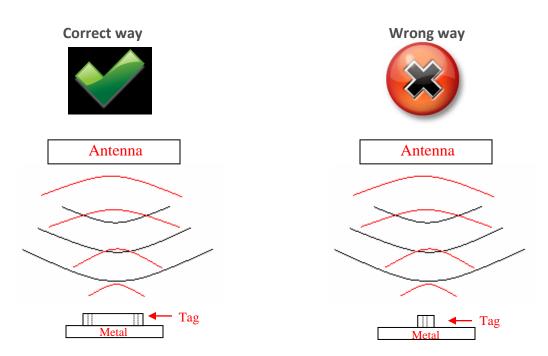


- **♣** Tag can be attached either through screw M5/ Rivets / Adhesive tape.
- ♣ The distance between hole to hole is 126.5mm. Elliptical shape of hole provides flexible attachment of tag.

# M-Crown Tag Angular Sensitivity

(Relative Read Range vs. Orientation)

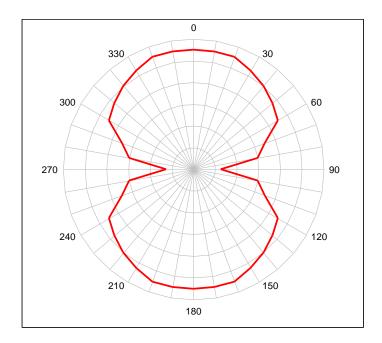

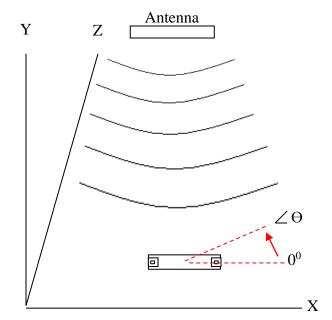

Read range (in percent) at various angle.

Tag is rotated in the X-Y plane about the z axis