



## Armada Tag (Global)


### FEATURES

- Operates effectively with a very good read range.
- Rugged construction for high durability
- Can be attached by screws with the help of two holes.
- Can also be provided with Adhesive tape for easy attachment.
- Flexible Read/Write Range (reader dependant).

### APPLICATIONS

- Used in asset tracking applications such as Plastics Containers and warehousing solutions.
- Most suitable for direct application on corrugated box, parts made up of plastic and wood.
- Factory automation, Automotive & Security purpose.


<b>Chip Type:</b>	<b>Alien Higgs 9, GS1 Class 1 Gen 2</b>	
	<b>EPC Memory:</b> Up to 496-EPC Bits (nominally 96 bits)	
	<b>User Memory:</b> Up to 688 Bits	
	<b>Data Retention:</b> 50 Years	
	<b>Write Endurance:</b> 200,000 Cycles	
<b>Mechanical:</b>	<b>Dimension</b>	55 x22 x 5mm
	<b>Material</b>	ABS
	<b>Colour</b>	White
	<b>Weight</b>	5.6 g
<b>Electrical:</b>	<b>Operating Frequency</b>	860-960MHz (Global Frequency)
	<b>Operating mode</b>	Passive (battery-less transponder)
<b>Ingress Protection:</b>	IP68	
<b>Thermal:</b>	<b>Storage Temp.</b>	-25°C to +85°C
	<b>Operating Temp.</b>	-25°C to +85°C
<b>Part Number:</b>	391V1	
<b>Options:</b>	<b>Available with:</b>	
	Other IC type and Frequency on request	
	Other plastic material and colours	
	Adhesive backing for easy mounting (indoor application)	
Available for metallic application		

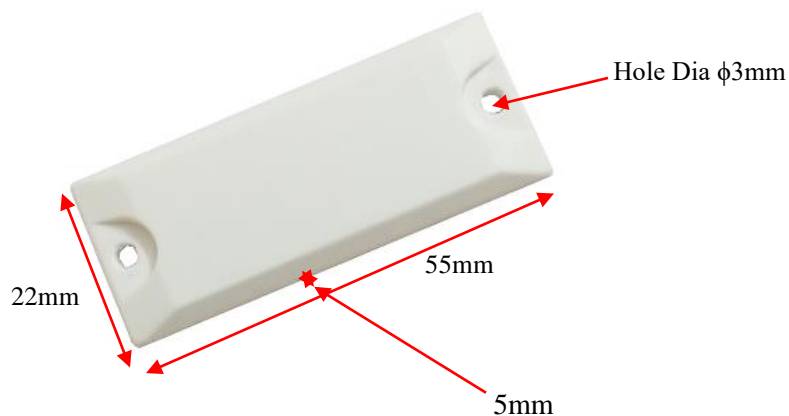

Note: Tolerance applicable are **Length:  $\pm 1\text{mm}$** , **Width:  $\pm 0.5\text{mm}$**  and **Thickness:  $\pm 0.3\text{mm}$** .

## Tag Placement


- ✚ Armada Tag is polarized parallel to the length.
- ✚ Ensure that there is no hindrance between the tag and the reader antenna.
- ✚ Reader antenna should be parallel to the tag length as shown in below figure:

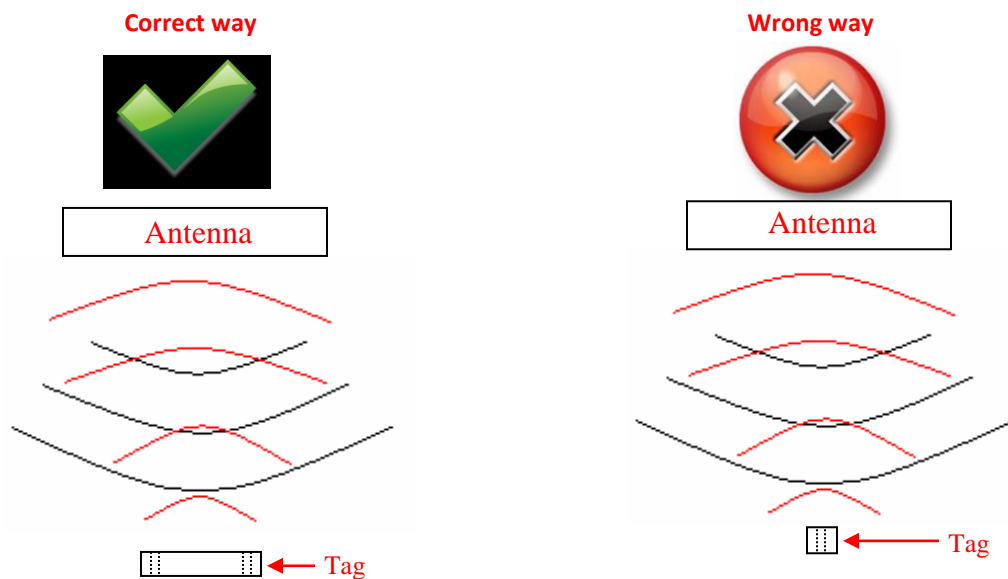


- ✚ Tag can be attached either through screw M3/ Rivets / Adhesive tape.
- ✚ The distance between the hole to hole is 47mm

**Armada Tag orientation Sensitivity**

(Relative Read Range vs. Orientation)

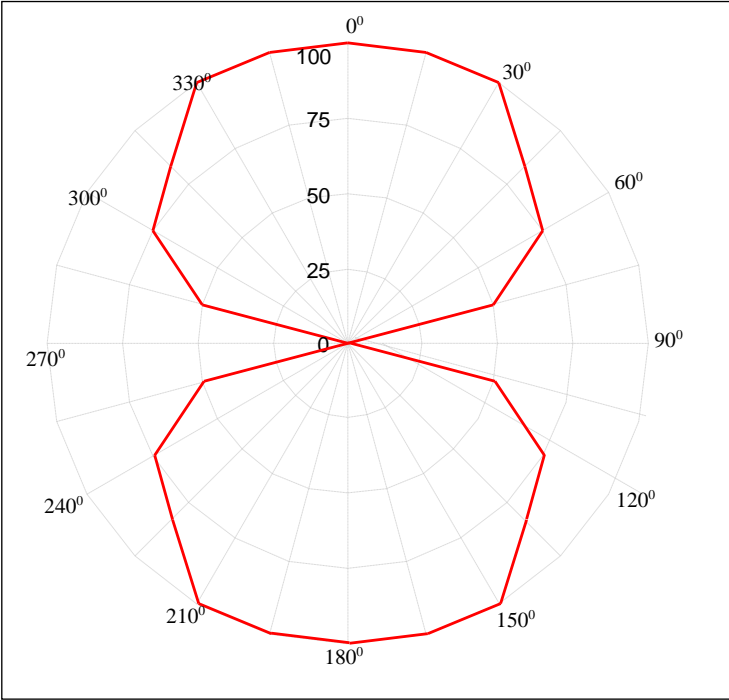

Read range (in percent) at various angle.

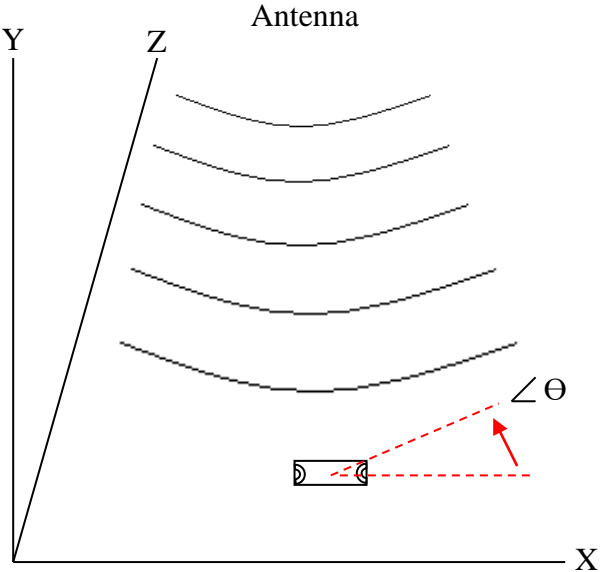

Tag is rotated in the X-Y plane about the z axis