



M-Warrior Tag^{2K} (High Memory-2K bit)


FEATURES

- Operates effectively with good read range, especially when attached to metal
- Rugged construction for high durability
- Can be attached by thread or cable tie
- Can also be provided with Adhesive tape for easy attachment
- Flexible Read/Write Range (reader dependant)

APPLICATIONS

- M-Warrior is ideal for applications that require high memory for storing information of Equipment, Parts, Containers, railway, and warehousing management such as manufacturing, repair data etc
- Factory automation, Automotive & Security purpose

Chip Type:	Qstar-35, Compatible with EPC global Class 1 Gen 2 & ISO/IEC 18000-6C	
	EPC Memory: 96 bits extendable up to 496 bits	
	User Memory: 2K bits	
	Data Retention: 30 years	
	Write Endurance: 100,000 cycles	
Mechanical:	Dimension	61.5 x 14.3 x 13 mm
	Material	ABS GF
	Colour	Black
	Weight	9.2 g
Electrical:	Operating Frequency	865-868MHz, (902-928MHz also available on request)
	Operating mode	Passive (battery-less transponder)
Ingress Protection:	IP68	
Thermal:	Storage Temp.	-25°C to +85°C
	Operating Temp.	-25°C to +85°C
Part Number:	318W1	
Options:	Available with:	
	User Memory 4K, 8K & 64K on request.	
	Other Frequency on request.	
	Other plastic material and colors.	
Adhesive backing for easy mounting.		

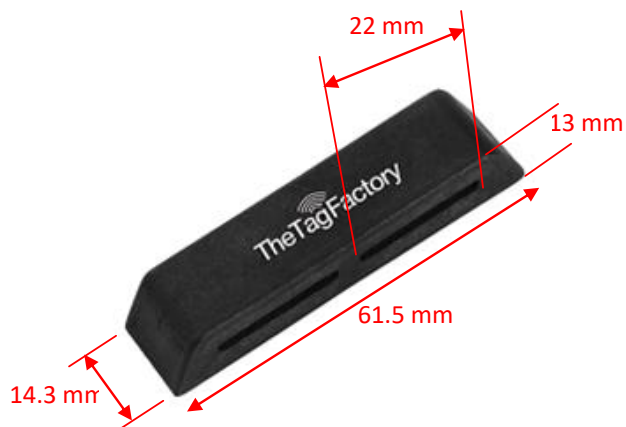


Note: Tolerance applicable are **Length:** $\pm 1\text{mm}$, **Width:** $\pm 0.5\text{mm}$ and **Thickness:** $\pm 0.3\text{mm}$


Tag Placement

- ✚ M-Warrior is polarized parallel to the length.
- ✚ Place the tag in such a way that most of its bottom area comes in direct contact with metal.
- ✚ Ensure that there is no hindrance between the tag and the reader antenna.
- ✚ Reader antenna should be parallel to the tag length as shown in below figure:

Correct way

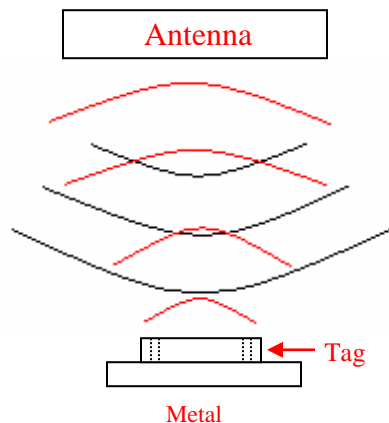


Wrong way

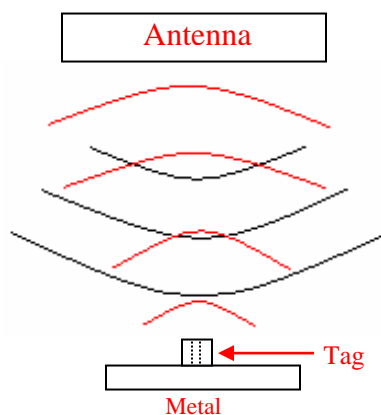


- ✚ Tag can be attached either through screw M3/ Rivets / Adhesive tape
- ✚ The distance between the hole to hole is 47mm

M-Warrior Tag orientation Sensitivity
(Relative Read Range vs. Orientation)

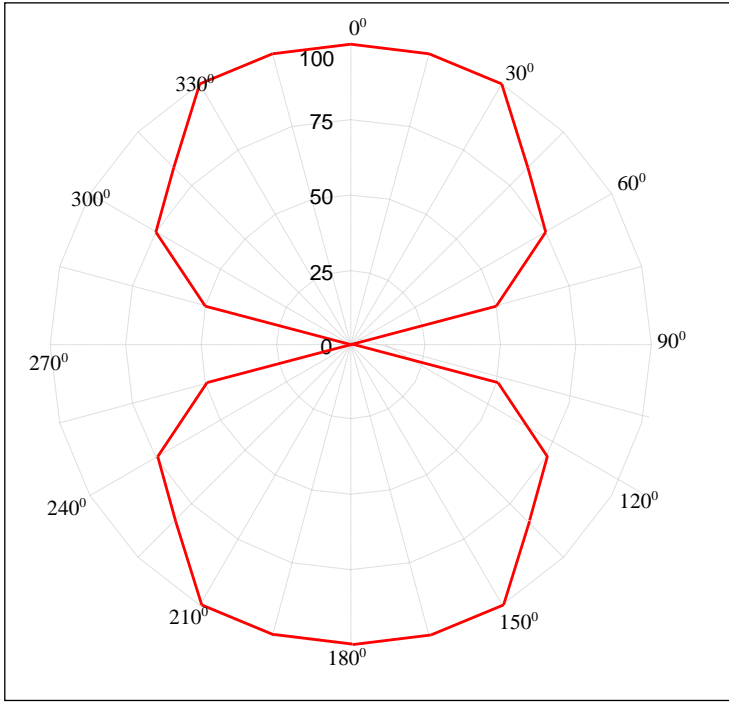

Read range (in percent) at various angle.

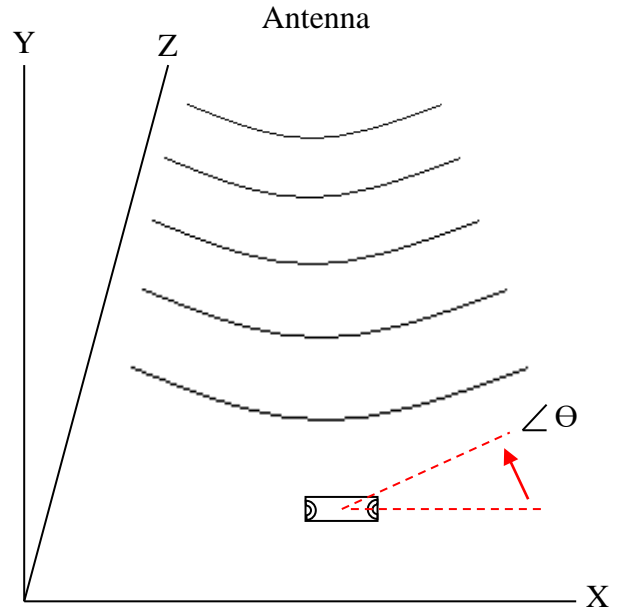

Tag is rotated in the X-Y plane about the z axis