



Secure-it Tag (Tamper-proof)


FEATURES

- Secure-it Tag is a Tamper-proof hard tag, operates effectively with a good read range, especially when attached to metal substrates.
- Rugged construction make the tag tamper-proof.
- Provided with Adhesive tape for easy attachment.
- The tag does not have a battery, making it low cost and life-long.
- Flexible Read/Write Range (reader dependent).

APPLICATIONS

- Used in applications where security required such as Laptops, desktops, servers, Equipment, and warehousing solutions.
- Rental & return tracking for tools, vehicles, or other equipment.
- Factory automation, Automotive & Security purpose.

Chip Type:	Impinj Monza R6-P, GS1 Class 1 Gen 2	
	EPC Memory:	Up to 128-EPC Bits (nominally 96 bits)
	User Memory:	32 Bits
	Data Retention:	50 Years
Mechanical:	Dimension	82 x 32 x 4mm
	Material	Engineering Plastics
	Colour	White
	Weight	6.60g
Electrical:	Operating Frequency	865-868MHz (only available in ETSI frequency)
	Operating mode	Passive (battery-less transponder)
Ingress Protection:	IP64	
Thermal:	Storage Temp.	-25°C to +85°C
	Operating Temp.	-25°C to +85°C
Options:	Available with:	
	Laser engraving/barcode/QRCode/encoding.	
	Other plastic material and colours	

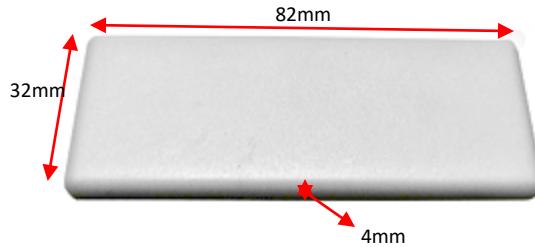

Note: Tolerance applicable is **Length: ± 1 mm**, **Width: ± 0.5 mm** and **Thickness: ± 0.3 mm**



Tag Placement


- Secure-it Tag is polarized perpendicular to length of the tag.
- Place the tag in such a way that most of its bottom area comes in direct contact with metal.
- Ensure that there is no hindrance between the tag and the reader antenna.
- Reader antenna should be parallel to the tag length as shown in the figure below:

Correct way



Wrong way

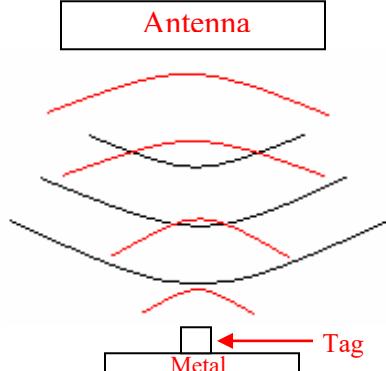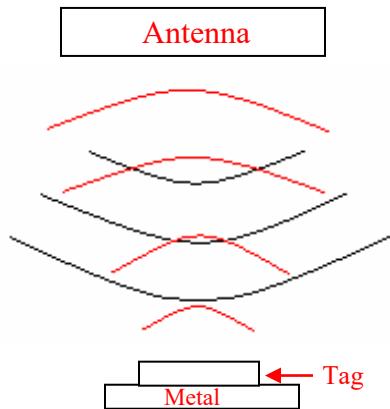

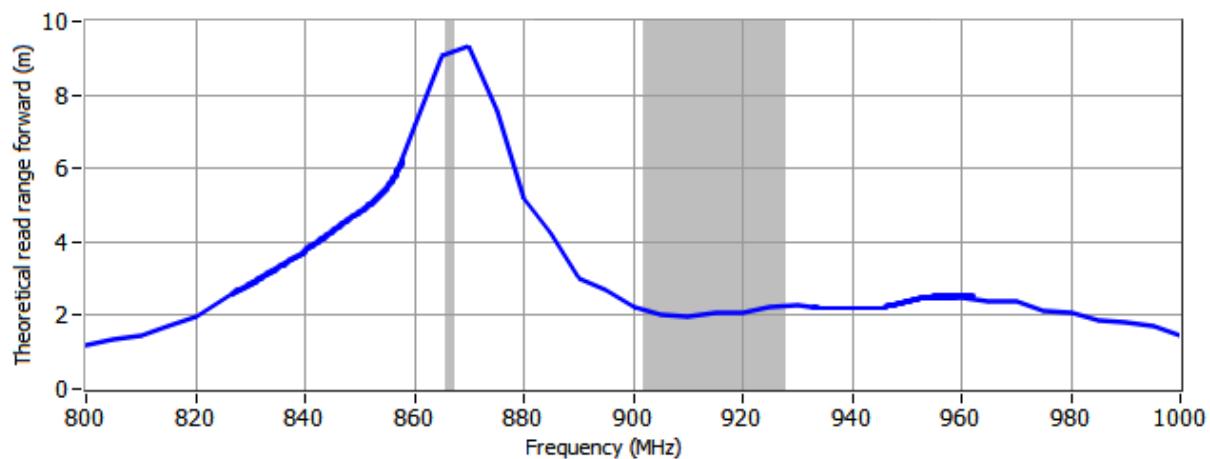

Angular Sensitivity

Secure-it Tag Angular Sensitivity (Relative Read Range vs. Orientation)

